



Installation Instructions for Conex Containers

SOLAR ROOFBLASTER™ SOLAR LIGHTBLASTER™

Look over the full installation instructions below before starting.

We want your installation to be successful. Call if you have any questions:

480.747.7097


NOTE: The installation of both of these products is nearly identical. Some of the photos will only show one of the products but either one installs the same way.

Materials Included:

- 16 roofing screws with rubber washer (a)
- 16 black rubber screw caps (b)
- EPDM foam gasket

Tools Needed:

- Drill (c)
- 1/4" driver (d) for the (a) screws
- cut off tool (e)
- high quality roofing sealant
- 6" locking extension (f) for RoofBlaster installs OR
- Right-Angle Attachment (g) for RoofBlaster installs

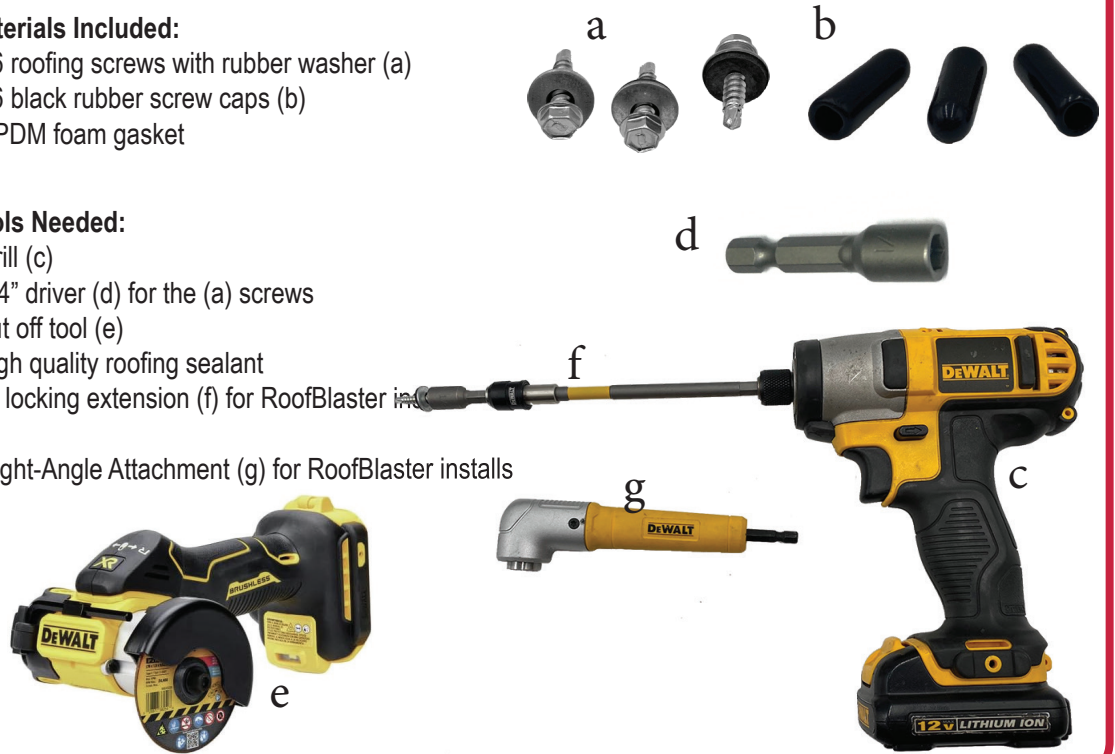

Step 1: Locate Install Location

Using the foam gasket, center it on top of a metal rib that is between rafters and hold the template while you do Step 2.



Step 3: Saw an Opening

Cut open the hole in the metal using a cut off tool.



Step 2: Trace Outline

Trace the inner edge of the gasket with a marker so you know where to cut. Be sure to press the gasket firmly along the metal rib while tracing.




Step 4: Caulk Around the Opening

Using a quality roof sealant (not included), caulk completely around the opening in the metal roof.




Installation Instructions for Conex Containers

SOLAR ROOFBLASTER™ SOLAR LIGHTBLASTER™

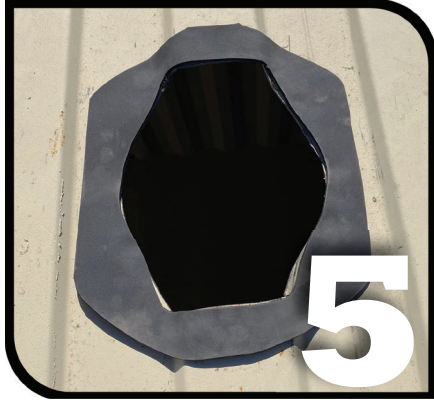

Step 5: Attach the Foam Gasket

Place the foam gasket and carefully press it into place around the opening..

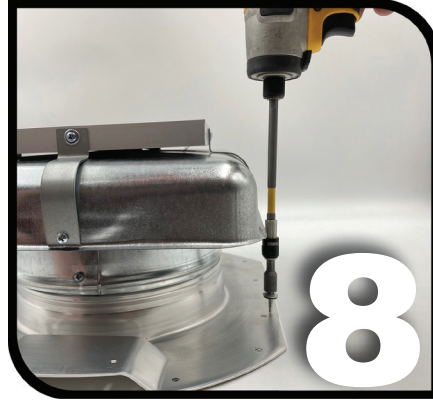

Step 8: Attach the Screws

Using a drill, attach all 16 of supplied screws using the drill bit. NOTE: Because of the hood on the RoofBlaster, you will need to use either a 6" extension or a right-angle attachment in order to get the screw to go in straight down.



Step 6: Caulk the Top of the Gasket

Using a quality roof sealant (not included), caulk completely around the top of the foam gasket.



Step 9: Attach Screw Caps

Cover each of the exposed screws with the supplied screw caps (optional).



Step 7: Install Product

Carefully place the RoofBlaster or LightBlaster on top of the foam gasket and press down firmly all around the flashing so it is sealed firmly.



Step 10: Enjoy Your Cooler/Lit Up Container!

Please feel free to share a photo of your installed RoofBlaster or LightBlaster on our Facebook page or on Amazon. We'd love to see our products in use and it will help other customers.