



# Installation Instructions for Conex Containers

# SOLAR ROOFBLASTER™ SOLAR LIGHTBLASTER™

Look over the full installation instructions below before starting.

We want your installation to be successful. Call if you have any questions:

**480.747.7097**

**NOTE:** The installation of both of these products is nearly identical. Some of the photos will only show one of the products but either one installs the same way.

### Materials Included:

- 16 roofing screws with rubber washer (a)
- 16 black rubber screw caps (b)
- EPDM foam gasket

### Tools Needed:

- 1/4" driver (c) for the (a) screws
- chop saw or sawzall
- high quality roofing sealant
- 6" locking extension (d) for RoofBlaster installs
- OR
- Right-Angle Attachment (e) for RoofBlaster installs
- Drill (f)



### Step 1: Locate Install Location

Using the foam gasket, center it on top of a metal rib that is between rafters and hold the template while you



### Step 3: Saw an Opening

Cut open the hole in the metal using a chop saw or sawzall.



### Step 2: Trace Outline

Trace the inner edge of the gasket with a marker so you know where to cut. Be sure to press the gasket firmly along the metal rib while tracing.




### Step 4: Caulk Around the Opening

Using a quality roof sealant (not included), caulk completely around the opening in the metal roof.




## Installation Instructions for Conex Containers

# SOLAR ROOFBLASTER™ SOLAR LIGHTBLASTER™

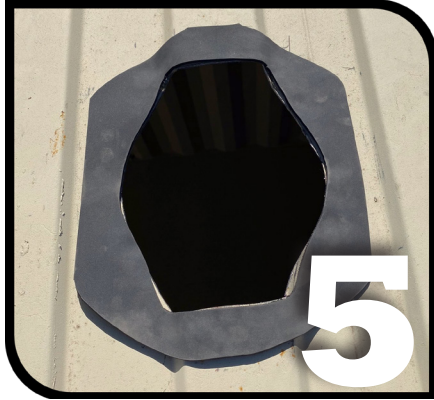

### Step 5: Attach the Foam Gasket

Place the foam gasket and carefully press it into place around the opening..

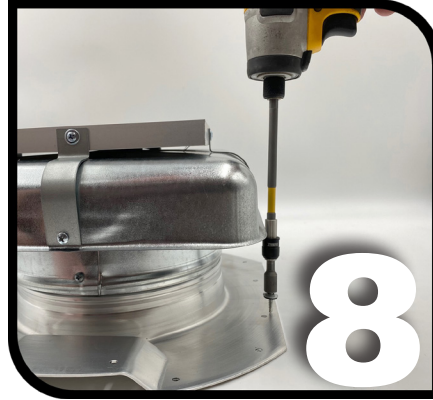

### Step 8: Attach the Screws

Using a drill, attach all 16 of supplied screws using the drill bit. NOTE: Because of the hood on the RoofBlaster, you will need to use either a 6" extension or a right-angle attachment in order to get the screw to go in straight down.



### Step 6: Caulk the Top of the Gasket

Using a quality roof sealant (not included), caulk completely around the top of the foam gasket.



### Step 9: Attach Screw Caps

Cover each of the exposed screws with the supplied screw caps (optional).



### Step 7: Install Product

Carefully place the RoofBlaster or LightBlaster on top of the foam gasket and press down firmly all around the flashing so it is sealed firmly.



### Step 10: Enjoy Your Cooler/Lit Up Container!

Please feel free to share a photo of your installed RoofBlaster or LightBlaster on our Facebook page or on Amazon. We'd love to see our products in use and it will help other customers.

Solar Blaster Corporation © 2020

[www.solarblasterfans.com](http://www.solarblasterfans.com)

Part No. SBRFB-CNX-068 & SBLT-CNX-067

<https://www.facebook.com/SolarBlaster>